

用于IP-Link的piconet扩展模块


模拟量输出4...20 mA

SNNE-04A-0009




- 4路模拟量输出0/ (4) ...20 mA
- 直接连接至IP Link
- 玻璃光纤加固外壳
- 模块电路封装
- 金属接插件
- 防护等级IP67


M12 × 1 输出



输出接线

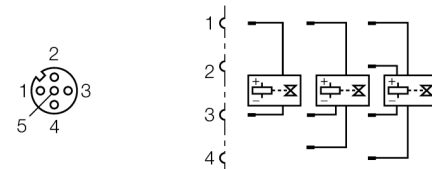

M8 × 1 电源



型号	SNNE-04A-0009
货号	6824201
通道数	4
工作/负载电压	20...29 VDC
工作电流	≤ 40 mA
Fibre-optic length	≤ 15 m
通道数	4 analogue outputs 20 mA
Load resistance	< 500 Ω
电气隔离	channels to operational voltage
Conversion time	< 3.5 ms
Relative measuring error	< ±0.3 % (全量程)
执行器供电	from load voltage
尺寸 (长/宽/高)	30 x 126 x 26.5 mm
振动测试	符合EN 60068-2-6标准
冲击测试	根据 DIN EN 60068-2-27
电磁兼容性	符合EN 61000-6-2/EN 61000-6-4标准
防护等级	IP67
认证	CE, cULus

LEDs

	LED designation	Status green	Status red	Function
IP-Link / module status	RUN / ERR (I/O)	flickers/ON	OFF	Receiving error-free IP-Link protocols
		flickers	flickers	Receiving faulty IP-Link protocols
		OFF	flickers	Receiving faulty IP-Link protocols / system fault
		OFF	ON	No receipt of IP-Link protocols / module error
Outputs	R / E (1...4)	OFF		No data transmission
		ON		Data transmission to D/A converter
			ON	No function (lights briefly in starting phase only)
Power supply	U _B	OFF		Operating voltage U _B < 18 VDC
		ON		Operating voltage U _B ≥ 18 VDC
	U _L	OFF		Load voltage U _L < 18 VDC
		ON		Load voltage U _L ≥ 18 VDC

过程映像中的数据

Valid for the setting "Motorola format"

SBn: Status byte channel n
CBn: Control byte channel n
Chn D0: channel n,
least significant data byte
Chn D1: channel n,
most significant data byte

	Address	Input data		Output data	
Pre-conditions	Word	High-Byte	Low-Byte	High-Byte	Low-Byte
Compact mapping: Starting with Ch0 D1 in "Low-Byte" word 0 all other bytes follow immediately. Only the user data are mapped (greyed in the table). Complex mapping: Data are mapped with control and status byte.	0	Ch0 D1	SB0	Ch0 D1	CB0
	1	SB1	Ch0 D0	CB1	Ch0 D0
	2	Ch1 D0	Ch1 D1	Ch1 D0	Ch1 D1
	3	Ch2 D1	SB2	Ch2 D1	CB2
	4	SB3	Ch2 D0	CB3	Ch2 D0
	5	Ch3 D0	Ch3 D1	Ch3 D0	Ch3 D1