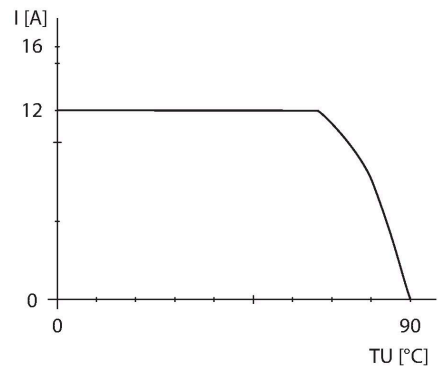


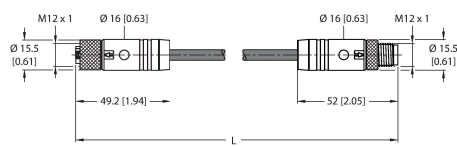


Technical data

Current	12 A
Mechanical and chemical properties	
Ambient temperature (fixed)	-30...+90 °C
Approvals	cULus
Note	
CAUTION: RISK OF ELECTRIC SHOCK! DO NOT DISCONNECT UNDER LOAD!	
- We reserve the right to make technical modifications without prior notice.	

Derating Curve



Accessories

Dimension drawing	Type	ID	
	TORQUE-WRENCH-SET-BUS	6936171	Torque wrench set; grip with adjustable torque 0.4 to 1.0 Nm; torque wrench set, fork wrench for M8 (SW9), fork wrench for M12 (SW13), fork wrench for M12 (SW14)
	RKP46PTB-2-RSP46PTB/TXL	100004536	Extension cable, M12 female connector, straight, 4-pin, T-coded; M12 male connector, straight, 4-pin, T-coded; cable length: 2 m, jacket material: PUR, black
	FW-ERKPM0414-PT-S-0810	100026334	Field-wireable female connector, M12 Power, T-coded, straight, 4-pin, screw terminal connection, cable feedthrough 8.0 to 10 mm, core cross-section/terminal capacity 1.5 to 2.5 mm², plastic housing, metal retaining screw
	FW-ERSPM0414-PT-S-0810	100026335	Field-wireable male connector, M12 Power, T-coded, straight, 4-pin, screw terminal connection, cable feedthrough 8.0 to 10 mm, core cross-section/terminal capacity 1.5 to 2.5 mm², plastic housing, metal retaining screw