


TW860-960-L44-18-P-B34-5KPCS

UHF Tag

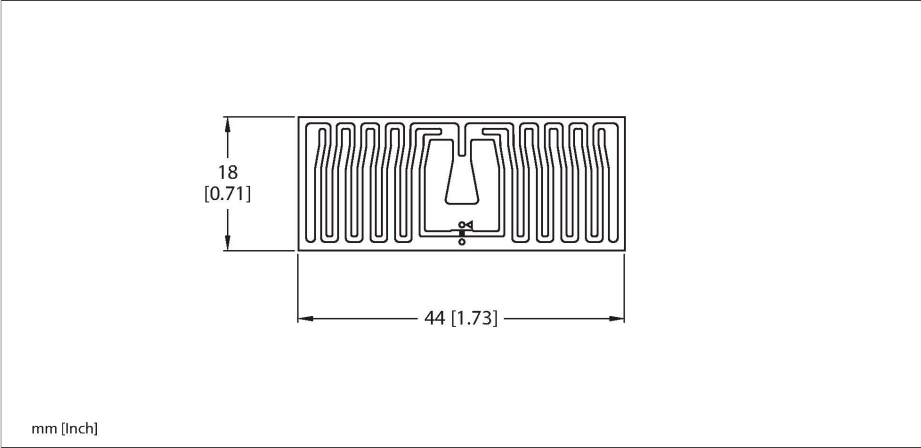

Technical data

Type	TW860-960-L44-18-P-B34-5KPCS
ID	100050383
Remark to product	Smart-Label, self-adhesive
Data transfer	Alternating electromagnetic field
Technology	UHF RFID
Region (UHF)	Global (860...960 MHz) ETSI (865...868 MHz) FCC (902...928 MHz)
Radio communication and protocol standards	ISO 18000-63 EPCglobal Gen 2
Design	Smart Label
Packaging unit	1

Technical data

Type	TW860-960-L44-18-P-B34-5KPCS
ID	100050383
Remark to product	Smart-Label, self-adhesive
Data transfer	Alternating electromagnetic field
Technology	UHF RFID
Region (UHF)	Global (860...960 MHz) ETSI (865...868 MHz) FCC (902...928 MHz)
Reading range on metal	7 m (2W ERP)
Memory type	EEPROM
Chip	NXP U-Code 9
Memory size	32 Byte
Memory	Read/Write
EPC memory	12 byte
Number of read operations	unlimited
Number of write operations	10 ⁵
Typical read time	2 ms/Byte



Features

- EEPROM, memory size 32 bytes
- EPC memory size up to 16 bytes

Functional principle

The UHF read/write heads form an air interface the size of which may vary, depending on the combination of read/write head and tag.


The read/write distances mentioned here only represent standard values measured under laboratory conditions and free from any influences caused by materials. Attainable distances may vary due to component tolerances, mounting conditions, ambient conditions and material qualities, especially when mounted in metal.

Testing of the application under real operating conditions is therefore essential, especially with read/write on-the-fly!

Technical data

Typical write time	3 ms/Byte
Radio communication and protocol standards	ISO 18000-63 EPCglobal Gen 2
Temperature during read/write access	-40...+85 °C
Temperature outside detection range	-40...+85 °C
Design	Smart Label
Housing length	44 mm
Housing width	18 mm
Packaging unit	1

Mounting instructions/Description

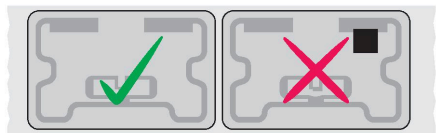

General Information
When mounting the tags, only remove them from the roll immediately before affixing them. Remove any dirt from the surfaces to be bonded and allow to dry. Liquids, oils, greases and other substances can reduce the effectiveness of the adhesive. If possible, affix the tag at room temperature (20–25 °C).
Defective tags are indicated by a black dot. Please do not use this tag.
Upon delivery, the number of marked defective tags is added to the total number of Smart Labels delivered.