


T18AW3DQ3


Photoelectric Sensor – Diffuse Mode Sensor

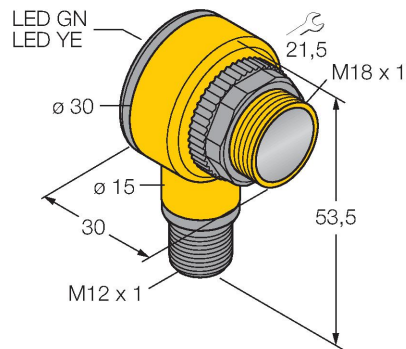

Features

- M12 × 1 male connector, 4-pin
- Protection classes IP67/IP69K
- Ambient temperature: -40 °C...+70 °C
- Selectable light/dark operation or light operation with alarm function

Wiring diagram




Functional principle

The emitter and receiver are incorporated in a single housing. The light reflection of the target is detected and triggers the sensor to switch. Thus the switching distance largely depends on the reflectivity of the target.

Excess gain curve

Excess gain in relation to the distance

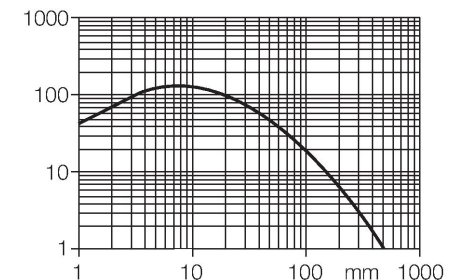

Technical data

Type	T18AW3DQ3
ID	3036921
Optical data	
Function	Proximity switch
Operating mode	Diffuse
Light type	IR
Wavelength	880 nm
Range	0...300 mm
Electrical data	
Operating voltage	20...250 VAC
AC rated operational current	≤ 200 mA
Output function	Light operation, Relay output
Switching frequency	≤ 40 Hz
Readiness delay	≤ 100 ms
Response time typical	< 16 ms
Setting option	Potentiometer
Mechanical data	
Design	Tube, T18
Dimensions	Ø 18 x 30 x 30 x 54 mm
Housing material	Plastic, Thermoplastic material
Lens	plastic, Acrylic
Electrical connection	Connector, M12 × 1, PVC
Number of cores	5
Ambient temperature	-40...+70 °C
Protection class	IP67 IP69
Special features	Chemical-resistant Encapsulated

Technical data

	Wash down
Power-on indication	LED, Green
Switching state	LED, Yellow
Excess gain indication	LED
Tests/approvals	
Approvals	CE, UL, CSA

Accessories

SMB1815SF

3053279

Mounting bracket, PBT black, for PICO-GUARD points

Technical drawing of the SMB1815SF mounting bracket. It is a 3D perspective view of a black PBT bracket. Dimensions are: top width 11,7, top length 50,8, front width 36,1, front height 25,4, side height 43,2, and a central hole with diameter 15. There are also smaller holes with diameter 5.

SMB18A

3033200

Mounting bracket, rectangular, stainless steel, for sensors with 18 mm thread

Technical drawing of the SMB18A mounting bracket. It is a 3D perspective view of a rectangular stainless steel bracket. Dimensions are: top width 30, top length 41, side height 26, bottom width 46, and a central hole with diameter 18.5. There are also smaller holes with diameter 4.6 and a radius R 24.2.

SMB18FM

3079421

mounting bracket, black, M22 x1.5 mm, male thread, female thread M18 x 1, for sensors with 18 mm thread

SMBAMS18P

3073134

Mounting bracket, stainless steel, for sensors with 18 mm thread

Technical drawing of the SMBAMS18P mounting bracket. It is a 3D perspective view of a stainless steel bracket. Dimensions are: top width 45, top length 74, side height 17, bottom width 23, and a central hole with diameter 19. There are also smaller holes with diameters 6,53, 32, and 18, and a radius R 2,6.