


LEDIB85X220M

Vision System – Backlight

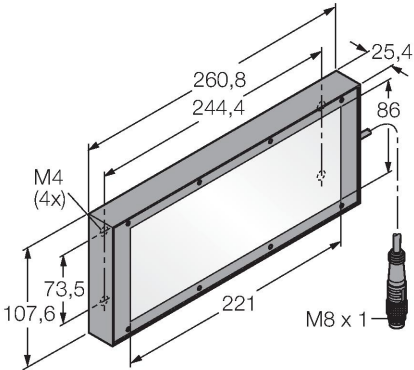

Features

- Protection class: IP40
- Color: infrared
- Power supply: 24 VDC
- Pigtail M8x1, 2 m

Wiring diagram



Technical data

Type	LEDIB85X220M
ID	3073272
Signal and display data	
Purpose	Image processing
Function	Area light
Light type	IR
Wavelength	850...940 nm
LED service life (L70)	50000 h
Electrical data	
Operating voltage U_b	24 VDC
DC rated operating current I_o	≤ 500 mA
Max. current consumption per color	500 mA
Mechanical data	
Design	Rectangular
Dimensions	260.8 x 107.6 x 25 mm
Housing material	Metal, Low-carbon steel
Window material	Acrylic, diffuse
Electrical connection	Cable with connector, M8 x 1, 2 m, PVC
Number of cores	3
Ambient temperature	0...+50 °C
Protection class	IP40
Tests/approvals	
Approvals	CE, cULus listed

Functional principle

Installed directly behind the object, opposite to the sensor. Highly diffuse surfaces and consistent brightness, with lower intensity compared to other lights.