



LED Linear Light In the Metal Housing WLS28-2XW1130DXPWMQ

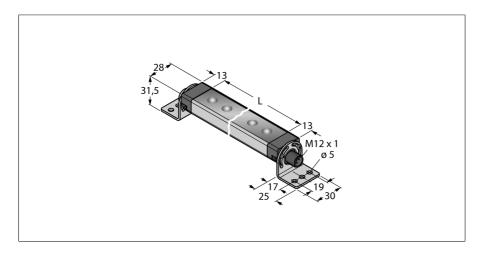

Туре	WLS28-2XW1130DXPWMQ	
ID	3094987	
Signal and display data		
Purpose	LED work light	
Function	Linear light	
Light type	White	
Color temperature	6100+7000K	
Aperture angle degree	60 °	
Beam angle	wide beam 40-80°	
LED service life (L70)	50000 h	
Dimmable	PWM	
Features of color 1	White, Permanently on, 2400 lm	
Electrical data		
Operating voltage U _B	1230 VDC	
DC rated operating current I _e	≤ 3040 mA	
Input power	36.48 W	
Mechanical data		
Cascadable	No	
Design	Rectangular, WLS28-2	
Housing material	Metal, AL	
Window material	Polycarbonate, diffuse	
Electrical connection	Connector, M12 × 1, PVC	
Number of cores	4	
Ambient temperature	-40+70 °C	
Storage temperature	-40+70 °C	
Relative humidity	090%	
Protection class	IP50	
Tests/approvals		
Approvals	CE, UL	

- Color: White
- M12 x 1 male, straight, 4-pin
- Dimmable via PWM input
- SMBWLS28RA mounting bracket included in delivery

Wiring Diagram



Functional principle

The energy-efficient LED work lights are ideally suited for industrial applications. The color temperature is between 6,000 and 7,100 Kelvin (cool white). Depending on the model, the luminous flux is 325 or 2600 lumen. Some work lights are switched on/off via supply power (10...30 VDC) and some types by means of a button directly at the LED lamp. In addition, the LED can be dimmed to 50% of its light output by activating a high signal on PIN 4, or for the variants with a switch by means of a further switch position. On some models the light output is continuously dimmable via a PWM signal on PIN 4. Cascadable variants are also available. Variants with a clear or diffuse plastic windows, as well as with an aperture angle of 25°.



Accessories

Type code	Ident no.		Dimension drawing
SMBWLSMAG	3019574	Magnetic fixture for mounting work lights and sensors, 2 pieces	o 5,1 o 51,8
SMBWLS28RA	3015764	Mounting bracket, angled, metal, for WLS28 work lights, 5 mm drill holes, screw set included	0 3 0 24 0 15,3 0 5 18 17, 19 25
SMBWLS28SP	3088063	Snap bracket for mounting WLS28 work lights	28.9 17.8 10.7,1.35