



LED Signal Light Tower Light TL50RYGBALSQ

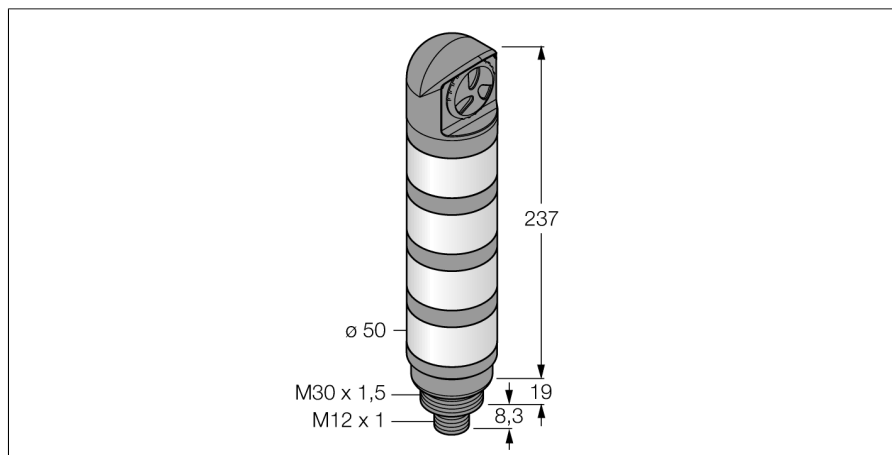

Type	TL50RYGBALSQ
ID	3095252
Signal and display data	
Purpose	LED indicator light
Function	Tower light
Light type	Red Yellow Green Blue
Dimmable	No
Features of color 1	Red, Permanently on, 7.5 lm
Features of color 2	Yellow, Permanently on, 5 lm
Features of color 3	Green, Permanently on, 23 lm
Features of color 4	Blue, Permanently on, 4.5 lm
Acoustic signal	Continuous tone, 94dB
Electrical data	
Operating voltage U_s	18...30 VDC
DC rated operating current I_s	≤ 100 mA
Operating voltage U_s	21...27VAC
Max. current consumption per color	45 mA
Max. current consumption of beeper	35 mA
Input type	Bipolar (PNP/NPN)22
Response time typical	< 10 ms
Mechanical data	
Cascadable	No
Design	Smooth barrel, TL50
Dimensions	$\varnothing 50 \times 264.6$ mm
Housing material	Plastic, ABS, Black
Window material	Polycarbonate, diffuse
Electrical connection	Connector, M12 $\times$ 1, PVC
Number of cores	8
Ambient temperature	-20...+50 °C
Relative humidity	0...95%
Protection class	IP67

- Plastic housing, black
- EMI and RFI immune
- Protection class IP67
- M12 x 1 male
- Multicolor: Red (COL 1) / Yellow (COL 2) / Green (COL 3) / Blue (COL 4)
- Operating voltage: 18...30 VDC or 24 VAC with 45 mA per LED color
- Inputs: PNP/NPN
- Beeper: Sealed, continuous tone max. 94 dB

Wiring Diagram

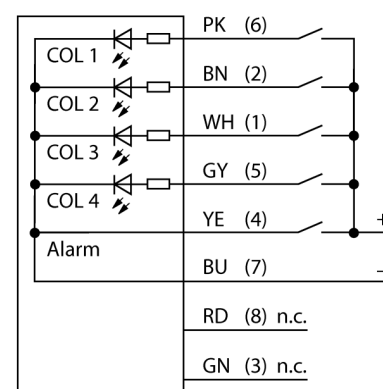

Functional principle

The TL50H tower lights, in the high-brightness version, provide highly visible status indicators and a clear user guidance within the entire system. They can be assembled from vari-colored LEDs and are available with or without beeper. You can mount them directly on machines, in the cabinet or in monitoring locations of production lines.

The wiring diagram shows a PNP pin assignment.

Tests/approvals**Approvals**

CE, UL listed

There are 5 colors available, blue (B), green (G), red (R), yellow (Y) and white (W), which specify the light sequence from bottom to top in the type code of the tower light. Example: TL50GYRQ, colors green, yellow and red arranged from bottom to top.