


WLS15CWW0500DSQP

LED Linear Light – In the Plastic Housing

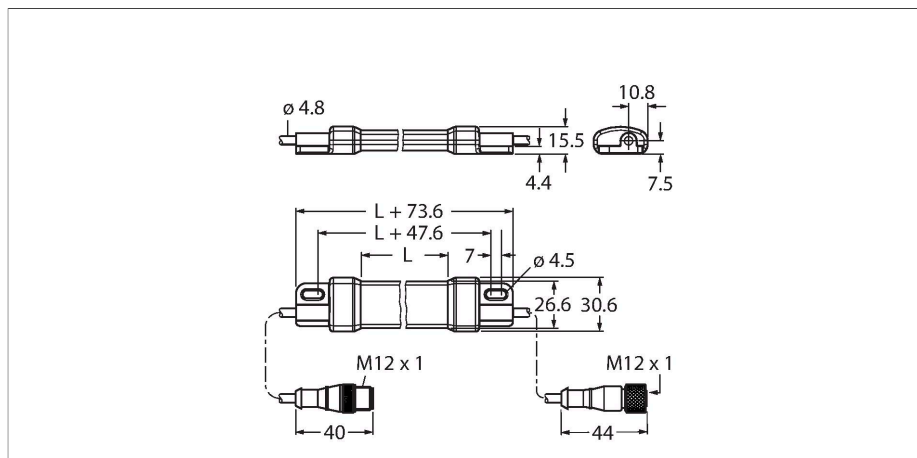



Technical data

Type	WLS15CWW0500DSQP
ID	3802057
Signal and display data	
Purpose	LED work light
Function	Linear light
Light type	White
Color temperature	2700...+3100 K
Aperture angle degree	60 °
LED service life (L70)	50000 h
Dimmable	PWM
Features of color 1	White, Permanently on, 510 lm
Electrical data	
Operating voltage U_B	10...27 VDC
DC rated operating current I_e	≤ 300 mA
Max. current consumption per color	720 mA
Mechanical data	
Cascadable	Yes
Design	Smooth barrel, WLS15
Dimensions	500 x 30.6 x 15.5 mm
Housing material	Plastic, PC PA, Anodized
Window material	Polycarbonate, diffuse
Electrical connection	Cable with connector, M12 x 1, 0.15 m, PVC
Number of cores	4
Ambient temperature	-40...+60 °C
Storage temperature	-40...+70 °C

Features

- Protection class IP67
- Connection: M12 x 1 cable with male connector, PVC, 150 mm, 4-pin
- Length of the illuminated area L: 426.4 mm
- Color: White
- Operating voltage: 10...15 VDC or 20...27 VDC
- Dimmable from 25 to 100 % with up to 1000 Hz over the input signal
- Cascadable

Wiring diagram

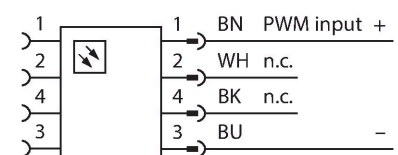

Functional principle

The energy-efficient LED work lights are ideally suited for industrial applications. Depending on the model, the luminous flux is 170 or 1400 lumen. The device is immediately operational upon application of power (10...15 or 20...27 VDC). The WLS15 series can thus be operated with either the 12 V usual in on-board electrical systems or the 24 V common in industrial applications. Cascadable variants are also available. Variants with a 2 m cable or a short cable with a M12 x 1 or Deutsch connector are available.

Application note:

Technical data


Protection class	IP66 IP67
Tests/approvals	
Approvals	CE, cULus, cURus

Cascading with a 12-V supply allows a total light length of 2.4 m. Cascading with a 24-V supply allows a total light length of 6.0 m.

Accessories


LMBWLS153802486

Mounting accessories, kit consisting of three retaining clips for wall mounting of WLS15 work lights




LMBWLS15-150S3802214

Mounting accessories, kit consisting of two retaining clips with option of rotation by 150°, for wall mounting of WLS15 work lights, stainless steel



LMBWLS15MAG3802238

Mounting accessories, kit consisting of two retaining clips with magnetic foot, for wall mounting of WLS15 work lights, retention force up to 16 lb




LMBWLS15TD3802296

Mounting accessories, kit consisting of two strips of double-sided adhesive tape, for wall mounting of WLS15 work lights

LMBWLS15TF3801144

Mounting accessories, kit consisting of two strips of double-sided foam urethane tape, for wall mounting of WLS15 work lights

Accessories

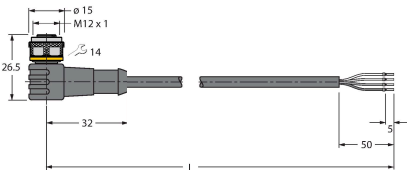Dimension drawing	Type	ID	
	RKC4.4T-2/TEL	6625013	Connection cable, M12 female connector, straight, 4-pin, cable length: 2 m, jacket material: PVC, black; cULus approval
	WKC4.4T-2/TEL	6625025	Connection cable, M12 female connector, angled, 4-pin, cable length: 2 m, jacket material: PVC, black; cULus approval