


Accessories

FDT/DTM HART Programming Adapter

IM-PROG III

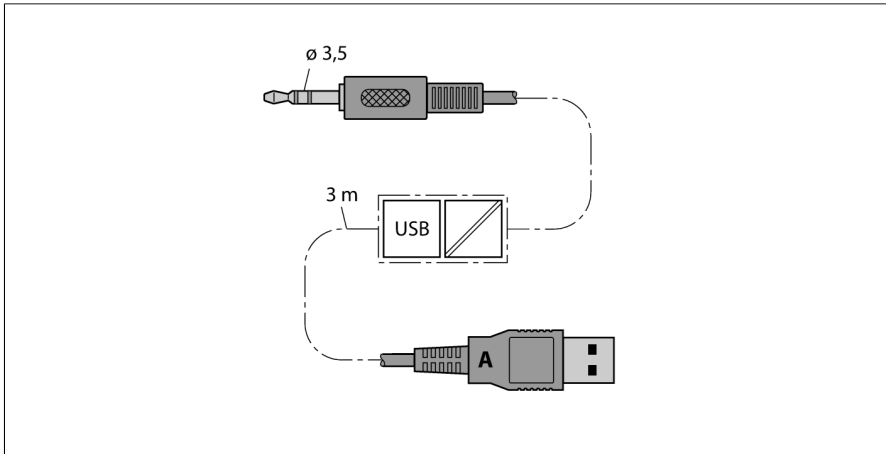

- FDT/DTM HART programming adapter
- 3.5 mm jack plug for connection to the device to be parametrized
- USB (A) plug for connection to the FDT/DTM PC
- Power supply via USB (A) at the PC
- Galvanic separation between the device to be parametrized and the PC
- Insulation voltage 500 VAC
- LED display for transmit and receive activities
- Driver support for Windows XP, Windows 7 (32 and 64 bit) and Linux
- Cable length approx. 3 m

Type	IM-PROG III
ID	7525111
Protection class	IP20
Ambient temperature	0...+50 °C
Dimensions	84.5 x 21 x 12.5 mm
Weight	100 g



Functional principle

The IM-PROG III is a USB-capable programming adapter for FDT/DTM based programming of HART enabled Turck devices.

The devices to be parametrized are connected to the programming adapter via the 3.5 mm jack plug. In addition to converting signal levels, the IM-PROG III separates the device to be parametrized and the PC galvanically, thus providing a safe and potential-free connection.

The programming adapter is not intended for power supply of the device to be parametrized.