



Voedingskabel
Verlengkabel
RSM RKM 36-2M/S1587



Type	RSM RKM 36-2M/S1587
Identnr.	U-16928
Connector A	Connector, 7/8"-16 UN, Recht
Aantal polen	3
Contacten	Messing, CuZn, Verguld
Contactdrager	Kunststof, TPU, Geel
Greep	Kunststof, TPU, Geel
Wartelmoer/-bout	Messing, CuZn, Vernikkeld
Beschermingsklasse	IP67, IP68, IP69, IP69K
Mechanische levensduur	> 100 Steekcycli
Vervuilingsgraad	3
Connector B	Contraconnector, 7/8"-16 UN, Recht
Aantal polen	3
Contacten	Messing, CuZn, Verguld
Contactdrager	Kunststof, TPU, Geel
Greep	Kunststof, TPU, Geel
Wartelmoer/-bout	Messing, CuZn, Vernikkeld
Beschermingsklasse	IP67, IP68, IP69, IP69K
Mechanische levensduur	> 100 Steekcycli
Vervuilingsgraad	3
Kabeldiameter	Ø 10.01 mm
Kabellengte	2 m
Kabelmantel	TPE, Geel
Aderisolatie	TPE
Aderkleuren	GNYE, BK, WH
Aderdoorsnede	3
Draadopbouw	65
Nominale spanning	600 V
Stroombelastbaarheid	10 A

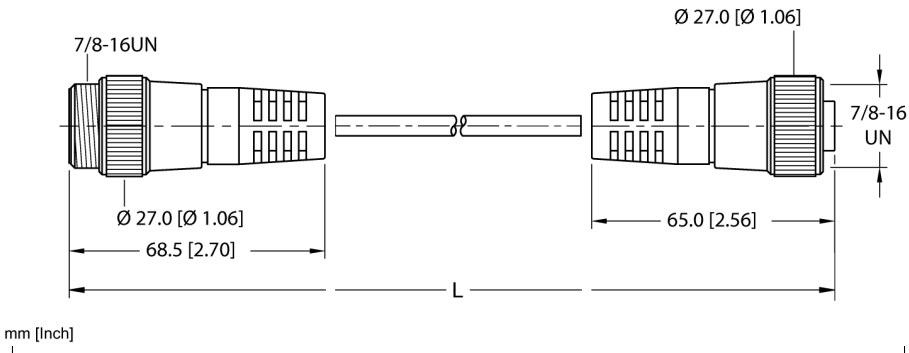

- 7/8" connector, recht, 3-polig
- 7/8"-contraconnector, recht, 3-polig
- Mantelmateriaal: TPE
- Mantelkleur: geel
- Beschermingsklasse: IP67, IP68, IP69, IP69K
- 7/8"-connector, recht, 3-polig
- 7/8"-contraconnector, recht, 3-polig
- Flexibele servicekabel
- TPE-buitenmantel, geel, 3 × 16 AWG
- UV-bestendig
- -50 °C koude buigsterkte
- Oliebestendig
- Brandklassen: UL 1100, CSA FT2

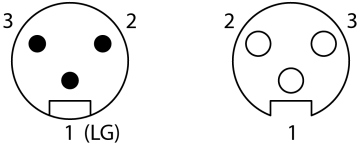

schakelplan

