


Przetwarzanie obrazu


Camera P3

PPROCAM1.3SG-G

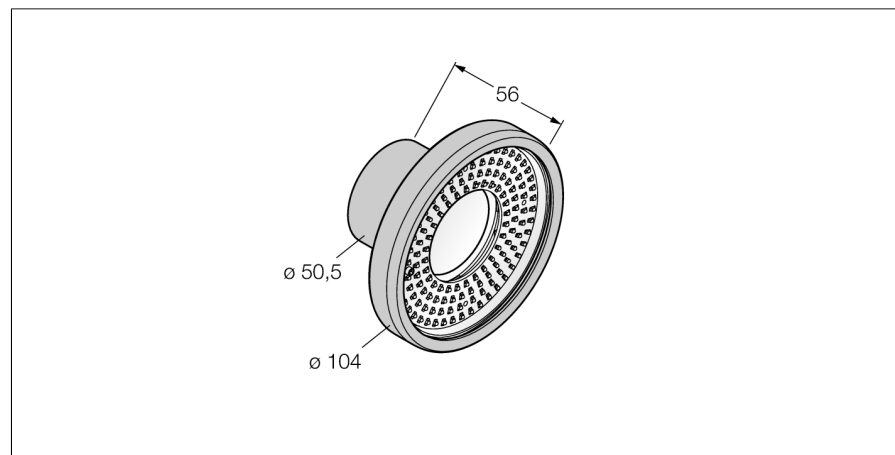

- Compact camera with integrated ring light
- Housing material aluminium
- Glas inspection window
- Protection class IP68
- Lens to be ordered separately
- Separate controller required, type PPROC-TL
- 2/3" CMOS, 752x480 pikseli
- 256-stopniowa skala szarości

Schemat podłączenia

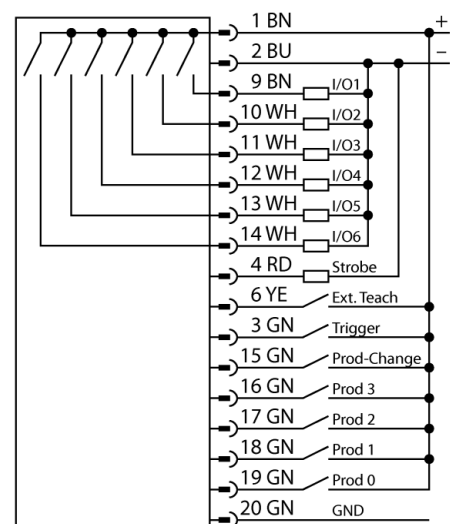

Zasada działania

The image processing system PresencePLUS PRO consists of the compact camera and the processing unit incorporated in a separate controller. Lens, external/internal lighting and connection cable are to be ordered separately. Freeware and firmware updates are available for download on:

www.bannerengineering.com

Typ	PPROCAM1.3SG-G
Nr kat.	3077052
Dane kamery	
Resolution	1280 × 1024 piksele
Rodzaj światła	zielony
Długość fali	520...535 nm
Prąd znamionowy DC I _a	
	≤ 550 mA
Dane mechaniczne	
Wymiary	Ø 104 x 143.3 mm
Materiał obudowy	Aluminium
Window material	szkło, przezroczysty
Temperatura pracy	0...+50 °C
Stopień ochrony	IP68
Testy/aprobata	
Certyfikaty	CE