


FP100-3000G-30-NA-H1141



Flow Meter – Immersion Sensor without Integrated Processing Unit

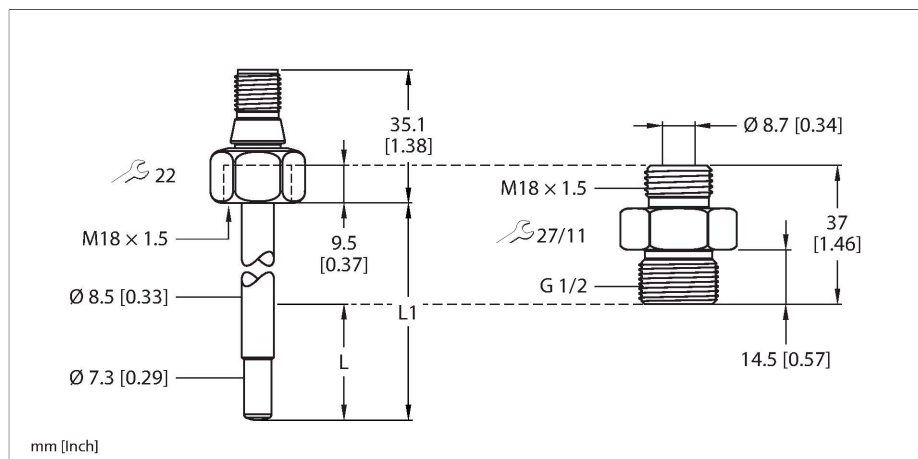

Features

- Screw-in adaptor with process connection G1/2" male thread included in delivery
- Housing material: 1.4571 (316Ti)
- Immersion depth 16.9 mm
- Flow monitoring for gaseous media
- Protection classes IP66, IP67 and IP69K
- Connector, M12 × 1

Wiring diagram

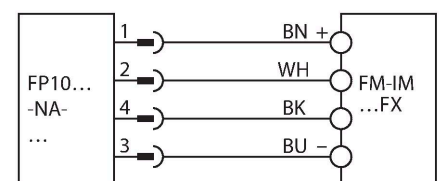

Functional principle

The flow sensor functions according to the calorimetric principle. The distinctive feature of this principle is that the flow rate correlates directly to the thermal loss of energy in the probe. The increased loss of energy is therefore a direct measure of an increased flow rate.

Technical data

Type	FP100-3000G-30-NA-H1141
ID	100001049
Medium temperature	-25...+85 °C
Application area	
Mounting conditions	Immersion sensor
Application area	gases
Bar length (L1)	45 mm
Immersion depth (L)	16.9 mm, When using the supplied adapter
Pressure resistance	300 bar
Response time T09	6 s
Response time T05	3 s
Standard flow range	10...3000 cm/s
Temperature gradient	≤ 300 K/min
Mechanical data	
Housing material	Stainless steel, 1.4571 (AISI 316Ti)
Adapter material	Stainless steel 1.4571 (316Ti)
Materials (contact with media)	Stainless steel 1.4571 (AISI 316Ti), FKM O-ring, AFM flat seal
Process connection sensor	M18 x 1.5 female thread
Process connection adapter	M18 × 1.5 male thread; G 1/2" male thread
Electrical connection	Connector, M12 × 1
Protection class	IP66 IP67 IP69K
Environmental conditions	
Ambient temperature	-40...+85 °C

Technical data


Storage temperature	-40...+80 °C
Shock resistance	50 g (11 ms) DIN EN 60068-2-27
Vibration resistance	20 G (55...2000 Hz)DIN EN 60068-2-6
Tests/approvals	
Approvals	CE cULus
UL registration number	E516036
MTTF	120 years acc. to SN 29500 (Ed. 99) 40 °C

Accessories

FAA-A1-1.4571

100001987


Screw-in adapter for immersion sensors from the series FS.., FP..; material: Stainless steel 1.4571 (316Ti); process connection: N1/2"



FAA-80-1.4571

100001988


Screw-in adapter for immersion sensors from the series FS.., FP..; material: Stainless steel 1.4571 (316Ti); process connection: G1/2"



FAA-04-1.4571

100001989


Screw-in adapter for immersion sensors from the series FS.., FP..; material: Stainless steel 1.4571 (316Ti); process connection: G1/4"



FAA-34-1.4571

100001990


Screw-in adapter for immersion sensors from the series FS.., FP..; material: Stainless steel 1.4571 (316Ti); process connection: N3/4"



FAA-81-1.4571

100001991

Screw-in adapter for immersion sensors from the series FS.., FP..; material: Stainless steel 1.4571 (316Ti); process connection: G3/4"



Accessories

Dimension drawing	Type	ID	
	WKC4.4T-2/TEL	6625025	Connection cable, M12 female connector, angled, 4-pin, cable length: 2 m, jacket material: PVC, black; cULus approval
	RKC4.4T-2/TEL	6625013	Connection cable, M12 female connector, straight, 4-pin, cable length: 2 m, jacket material: PVC, black; cULus approval
	WKC4.4T-2/TXL	6625515	Connection cable, M12 female connector, angled, 4-pin, cable length: 2 m, jacket material: PUR, black; cULus approval
	RKC4.4T-2/TXL	6625503	Connection cable, M12 female connector, straight, 4-pin, cable length: 2 m, jacket material: PUR, black; cULus approval

Accessories


Dimension drawing	Type	ID	
	FM-IM-3UP63FX	100000818	Signal processor for non-Ex flow sensors from the FP...-...-NA-... family; operating voltage 20...30 VDC; LED bar for displaying flow speed and medium temperature; IO-Link device with transistor outputs for flow, temperature and errors

Dimension drawing

Type
FM-IM-3UR38FX

ID
100000820

Signal processor for non-Ex flow sensors from the FP...-...-NA-... family; operating voltage 20...250 VAC; LED bar for displaying flow speed and medium temperature; IO-Link device with relay outputs for flow, temperature and errors

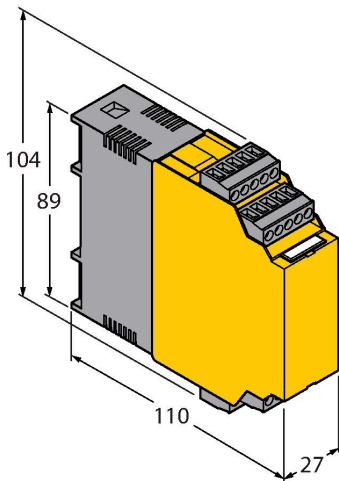

FM-IM-2UPLI63FX

100000819

Signal processor for non-Ex flow sensors from the FP...-...-NA-... family; operating voltage 20...30 VDC; LED bar for displaying flow speed and medium temperature; IO-Link device with analog output for flow and transistor outputs for temperature and errors

